


BPS 5000-C

Burn and proof test system for medium voltage cables

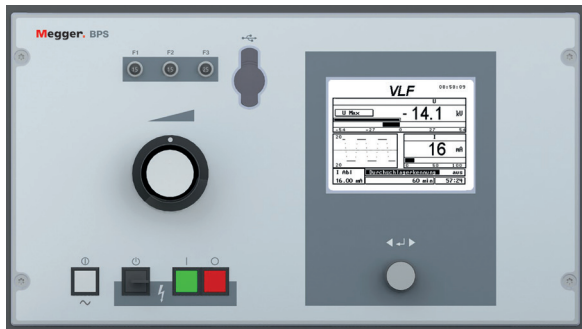

- **Control for AC-, DC- and VLF testing**
- **ARM® burning**
- **DC test up to 110kV**
- **Burning up to 110A**
- **VLF testing up to 54kV / 5uF**
- **Integrated Sheath fault location**

DESCRIPTION

This system is usually built into cable fault location systems, but can also be used as a portable device for fault converting or burning. The digital control unit, can be used in basic operations as a burner for cable faults that are difficult to locate and as a control device for an external test system. With this external test system you can carry out conventional DC tests or the long established and norm compliant VLF testing (cable testing) using the VLF 0.1 cosine rectangular wave form.

The leakage current during the VLF test is recorded, which is a special feature of the cosine rectangular wave form.

All essential measurements can be logged and transferred by using the integrated USB connection.

In combination with the Teleflex VX, the system can be used for ARM® Burning. This method allows a prelocation of high resistive faults, while fault conversion.

In addition the system provides a sheath fault pinpointing function with clocked DC voltage.

The user guidance occurs about proven easyGO control of Megger.

TECHNICAL DATA*

Fault conversion

Voltage/Current	0 ... 1.2 kV _{DC}	6.0 A
	4 kV _{DC}	1.5 A
	8 kV _{DC}	0.8 A
	15 kV _{DC}	0.5 A
	0 ... 60 V _{AC}	110 A
0 ... 240 V _{AC}	28 A	

DC test (with optional DC testing)

Voltage/Current	0 ... 80 kV, I _N 15 mA, I _{max} 50 mA
	oder
	0 ... 110 kV, I _N 7 mA, I _{max} 50 mA
Output power	1.5 kVA
Short circuit power	3.5 kVA (max. 1 h)

AC test

Voltage	58 kV _{AC}
----------------	---------------------

VLF – testing according to DIN VDE 0276

Voltage	0 ... 54 kV _{eff}
Max. load	21 µF bei 18 kV _{eff} @ 0.1 Hz
	8 µF bei 36 kV _{eff} @ 0.1 Hz
	5 µF bei 54 kV _{eff} @ 0.1 Hz
Nominal current	15 mA +/- 3 mA
Input power	1 kVA

Sheath fault location

Output voltage	0 ... 10 kV
Output current	800 mA (up to 5 kV)
	500 mA (up to 10 kV)
Clock	1:3

General

Display	LCD, resolution 320 x 240
Operating temperature	- 10 °C ... + 40 °C
Temperature range	Software controlled shutdown @ 120 °C
	Hardware controlled shutdown @ 145 °C
Input voltage	230 V +/- 10 %, 45 ... 60 Hz
Power consumption	Max. 7 kVA
Protection class	IP20
Safety class	I

* We reserve the right to make technical changes.

SALES OFFICES

Megger GmbH

Obere Zeil 2
D-61440 Oberursel
Germany
T 0049 6171 92987-0
E info@megger.de

Seba Dynatronic
Mess- und Ortungstechnik GmbH
Dr.-Herbert-Iann-Str. 6
96148 Baunach
Germany
T 0049 9544 68-0
E team.international@megger.de

BPSS000C_DS_EN_V01

www.megger.com
ISO 9001

The word 'Megger' is a registered trademark.

Megger[®]