

VLF 60 HP test system – High Power

High-performance VLF test system for 36 kV rated cables



- **Ideal for standard compliance testing of long cables such as submarine cables in offshore wind farms**
- **Reporting, breakdown detection and leakage current measurement**
- **Integrated discharge system**

DESCRIPTION


This high-performance 0.1 Hz VLF test system for cables with cosine-rectangular voltages works in accordance with VDE, IEC and IEEE-standards.

According to most regulations, cables and joints must be tested after installation or repair. The VLF 60HP test system can be used to test cables with operating voltage levels up to 36 kV. The system consists of a control unit and an HV unit. The high test capacity of 6.5 μF can simultaneously test all three phases with a standardized 0.1 Hz test frequency. Positive and negative DC testing of cables and connected switchgears can be carried out by switching to DC Mode. Aside from cable and sheath testing, the system can also be used to precisely pinpoint sheath faults (in combination with a step voltage probe like the ESG NT).

Using 0.1 Hz cosine-rectangular voltage, weak spots in the cable can be safely brought to a break-down. The benefits of the VLF method with 0.1 Hz cosine-rectangular voltage have been confirmed by multiple studies and practical field tests. The proven voltage is recommended by the Cenelec HD 620/621, IEC 60502-2, and IEEE 400.2 standard.

The VLF 60HP test system can be used both as a stand alone system (permanently installed in a transportation container for operations such as cable testing on offshore wind-farms) or integrated into a test van system. The integrated safety system and breakdown recognition software maximise safety.

Furthermore, the leakage current measurement enables a qualitative assessment of the cable, and the protocol function allows test data to be printed and stored for further reporting purposes.

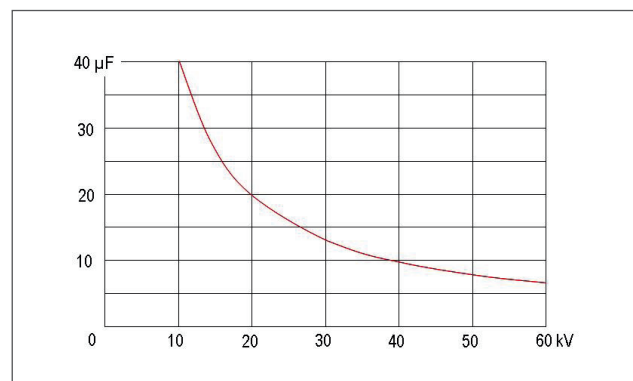

Testable capacities

TECHNICAL DATA*

VLF CR-60-HP

0.1 Hz VLF operation

Wave shape	Cosine-Rectangular
Output voltage	0 ... 60 kV _{RMS}
Output current	0 ... 12.5 mA (resolution 10 µA)
Frequency	0.1 Hz
Testable cable capacitance	6.5 µF @ 0.1 Hz and 60 kV _{RMS}

DC operation

Output voltage	0 ... ± 60 kV
Breakdown recognition	Integrated
Leakage current measurement	Integrated
Reporting	Integrated
Sheath fault pinpointing	0 ... 10 kV / Duty cycle 1:3, 1:5, 1:9
Input voltage	115 V / 230 V ± 10 %, 50 / 60 Hz, 1900 VA
Dimensions (W x H x D)	1350 x 1250 x 1100 (1500**) mm
Weight	380 kg
Protection class	IP 20
Operating temperature	-25 °C ... +55 °C
Storage temperature	-40 °C ... +70 °C

FEATURES

- Ideal for testing long 36 kV submarine cables
- High test capacity
- Maximises user safety through automatic discharge of the test object and earth loop monitoring
- Breakdown recognition
- VLF, DC and sheath fault pinpointing in one device

MAXIMUM TEST LENGTH

10 kV XLPE cable, U _t = 18 kV _{RMS}	Single phase 84 km Three phase 28 km
20 kV XLPE cable, U _t = 36 kV _{RMS}	Single phase 45 km Three phase 15 km
36 kV XLPE cable, U _t = 60 kV _{RMS}	Single phase 27 km Three phase 9 km

ORDERING INFORMATION

Product	Order no.
VLF CDR-60-HP incl. manual operated LV and HV cable drum, 50 m	890022222-S
Options:	
Container incl. installation costs	138315319
HV cable drum, 50 m, motor driven	890017195
De-humidifier VLF 60/80 kV***	890018889

* We reserve the right to make technical changes; ** Depending on position of HV output;

*** For use in off shore and high humidity environment of essential importance!

SALES OFFICES

Megger GmbH

Obere Zeil 2
D-61440 Oberursel
Germany
T 0049 6171 92987-0
E info@megger.de

Seba Dynatronic
Mess- und Ortungstechnik GmbH
Dr.-Herbert-Iann-Str. 6
96148 Baunach
Germany
T 0049 9544 68-0
E team.international@megger.de

VLF60HP_DS_EN_V01

www.megger.com

ISO 9001

The word 'Megger' is a registered trademark.

Megger®